









RF transistor list

							
1 2 3 TO- 92L	1 2 3 TO- 202	1 2 3 TO- 202N	1 2 3 TO- 126	1 2 3 TO- 220	1 2 3 TO- 39	1 2 3 TO- 60	T- 31E

Bipolar NPN Power Transistor

Transistor	Power	Gain	Voltage	Frequency	Mod
2N3375	10W	5dB	28V	400MHz	FM/AM/S
2N3553	2,5W	10dB	28V	175MHz	FM/AM
2N3632	20W	7dB	28V	175MHz	FM
2N3866	5W	10dB	28V	400MHz	WINTrans
2N3924	4W	6dB	13,6V	175MHz	WINTrans
2N4427	2W	10dB	12V	175MHz	WINTrans

2N5108	1W	5dB	24V	1200MHz	WINTrans
2N5109	3,5W	11dB	15V	200MHz	WINTrans
2N5421	3W	9dB	13,5V	175MHz	WINTrans
2N5913	2W	7dB	12,5V	175MHz	WINTrans
2N5943	1W	8dB	15V	400MHz	FM
2SC730	0,8W	10dB	13,5V	175MHz	FM
2SC1096	10W			60MHz	FM
2SC1173	10W			100MHz	FM/AM/S
2SC1306	16W			30MHz	FM/AM/S
2SC1307	16W	12dB	12V	30MHz	FM/AM/S
2SC1590	5W	10dB	12,5V	136-174MHz	FM

2SC1591	14W	7,5dB	12,5V	136-174MHz	FM
2SC1678	5W			30MHz	<i>WINTrans</i>
2SC1728	8W			80MHz	<i>WINTrans</i>
2SC1729	14W	10dB	13,5V	175MHz	FM
2SC1909	10W	14,5dB	13,5V	50MHz	FM/AM/S
2SC1944	13W	11,1dB	12V	30MHz	<i>WINTrans</i>
2SC1945	16W	14,5dB	12V	30MHz	FM/AM/S
2SC1946	25W	6,7dB	13,5V	175MHz	FM
2SC1946A	30W	10dB	13,5V	175MHz	FM
2SC1947	3W	10dB	13,5V	175MHz	FM

<u>2SC1957</u>	1,8W	17dB	12V	30MHz	WIN <i>Trans</i>
2SC1966	3W	7,8dB	13,5V	470MHz	FM
2SC1967	7W	6,7dB	13,5V	470MHz	FM
2SC1968	14W	3,7dB	13,5V	470MHz	FM
2SC1968A	14W	5,4dB	13,5V	470MHz	FM
<u>2SC1969</u>	18W	12dB	12V	30MHz	FM/AM/S
<u>2SC1970</u>	1,5W	10dB	13,5V	175MHz	WIN <i>Trans</i>
<u>2SC1971</u>	7W	10dB	13,5V	175MHz	WIN <i>Trans</i>
<u>2SC1972</u>	14W	10dB	13,5V	175MHz	WIN <i>Trans</i>
<u>2SC1973</u>	1W			50MHz	WIN <i>Trans</i>

<u>2SC1974</u>	13W	10dB	13,5V	30MHz	WIN <i>Trans</i>
<u>2SC1975</u>	4W	10dB	13,5V	30MHz	WIN <i>Trans</i>
<u>2SC2028</u>	1,8W			30MHz	WIN <i>Trans</i>
<u>2SC2029</u>	6W			30MHz	WIN <i>Trans</i>
<u>2SC2036A</u>	1,4W				WIN <i>Trans</i>
<u>2SC2050</u>	10W	12dB	13,5V	30MHz	FM/AM/S
<u>2SC2053</u>	0,2W	15,7dB	12V	175MHz	FM/AM
<u>2SC2055</u>	0,25W	15,3dB	12V	175MHz	FM/AM

<u>2SC2056</u>	1,5W	9dB	12V	175MHz	FM
<u>2SC2075</u>	4W		13,5V	27MHz	WINTrans
<u>2SC2078</u>	4W	13dB	12V	100MHz	FM/AM
<u>2SC2086</u>	0,45W	13dB	12V	175MHz	FM/AM
<u>2SC2092</u>	4W	13dB	12V	100MHz	FM/AM/S
<u>2SC2094</u>	15W	8,8dB	13,5V	175MHz	FM/AM/S
<u>2SC2166</u>	6W	13,8dB	12V	30MHz	FM/AM/S
<u>2SC2207</u>	16W				WINTrans
2SC2237	6W	13,8dB	13,5V	175MHz	FM

2SC2312	18,5W			27MHz	FM/AM/S
2SC2314	1,8W	17dB	12V	180MHz	FM/AM
2SC2509	13W	14dB		30MHz	<i>WINTrans</i>
2SC2527	60W				<i>WINTrans</i>
2SC2538	0,6W	10dB	12V	175MHz	FM/AM
2SC2539	14W	14,5dB	13,5V	175MHz	FM
2SC2660	30W			30MHz	<i>WINTrans</i>
2SC2695	23W	1,9dB	13,5V	520MHz	FM
2SC3001	6W	13dB	7,2V	175MHz	FM
2SC3017	1W	11dB	13,5V	175MHz	FM

2SC3018	3W	13dB	7,2V	175MHz	FM
2SC3020	3W	10dB	12,5V	520MHz	FM
2SC3021	7W	7,7dB	12,5V	520MHz	FM
2SC3022	18W	4,8dB	12,5V	520MHz	FM
2SC3103	2,8W	6,7dB	7,2V	520MHz	FM
2SC3104	6W	4,8dB	7,2V	520MHz	FM
2SC3133	13W	14dB	12V	1,5-30MHz	FM/AM/S
2SC3297	15W			100MHz	<i>WINTrans</i>
2SC3299	20W				<i>WINTrans</i>
2SC3668	1W			100MHz	<i>WINTrans</i>
2SC3807	15W			260MHz	<i>WINTrans</i>
2SC4137	4W			400MHz	<i>WINTrans</i>

2SC4693					FM/AM
KTC1006	1W			100MHz	FM/AM
KTC1969	16W	12dB	12V	100MHz	FM/AM
KTC2078	4W	11dB	12V	100MHz	FM/AM
MRF161	5W	13,5dB	12,5V	225-500MHz	FM/AM
MRF162	15W	13,5dB	12,5V	225-500MHz	FM/AM
MRF163	25W	12dB	12,5V	225-500MHz	FM/AM
MRF237	4W	12dB	18V	175MHz	WINTrans
MRF260	5W	10dB	12,5V	136-174MHz	FM

MRF261	10W	5,2dB	12,5V	136-174MHz	FM
MRF262	14W	7,5dB	12,5V	136-174MHz	FM
MRF264	30W	5,2dB	12,5V	136-174MHz	<i>WINTrans</i>
MRF340	8W	13dB	28V	70MHz	<i>WINTrans</i>
MRF342	24W	11dB	28V	70MHz	<i>WINTrans</i>
MRF344	60W	6dB	28V	70MHz	<i>WINTrans</i>
MRF454	80W	12dB	12,5V	1,5-30MHz	FM/AM/S
MRF455	60W	13dB	12,5V	1,5-30MHz	FM/AM/S
MRF475	12W	10dB	13,5V	1,5-30MHz	FM/AM/S
MRF476	3W	15dB	13,5V	1,5-30MHz	FM/AM/S

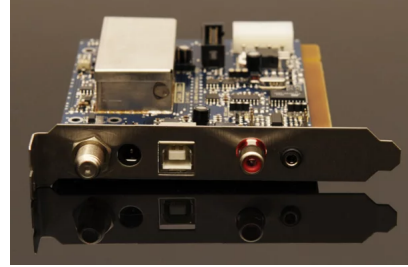
MRF477	40W	15dB	13,5V	1,5-30MHz	FM/AM/S
MRF479	15W	10dB	13,5V	1,5-30MHz	FM/AM/S
MRF485	15W	10dB	28V	1,5-30MHz	WIN <i>Trans</i>
MRF486	40W	15dB	28V	1,5-30MHz	WIN <i>Trans</i>
MRF496	40W	15dB	13,5V	1,5-30MHz	WIN <i>Trans</i>
MRF497	60W	10dB	13,5V	27-50MHz	WIN <i>Trans</i>
MRF517	0,75W	10dB	20V	1000MHz	WIN <i>Trans</i>
MRF607	1,75W	11,5dB	16V	175MHz	WIN <i>Trans</i>
MRF660	7W	5,4dB	12,5V	400-512MHz	WIN <i>Trans</i>
MS1226	30W	18dB	28V	30MHz	FM/AM/S
MS1227	20W	15dB	12,5V	30MHz	FM/AM/S



[CyberMaxFM+ SE+ V3 1000W FM transmitter package with antenna and coaxial cable](#)

FET Power Transistor

Transistor	Power	Gain	Voltage	Frequency	Mode	Ca
MRF134	5W	14dB	28V	30-225MHz	FM/AM/SSB	
MRF136	15W	16dB	28V	30-225MHz	FM/AM/SSB	
MRF148A	30W	18dB	50V	2-225MHz	FM/AM/SSB	
MRF171A	45W	19,5dB	28V	30-225MHz	FM/AM/SSB	
MRF173	80W	13dB	28V	30-225MHz	FM/AM/SSB	
MRF174	125W	11,8dB	28V	30-225MHz	FM/AM/SSB	
<u>MS1307</u>	25W	dB	13,5V	30MHz	FM/AM/SSB	TC 220



[PC FM transmitter card for your PC](#)

Insert this into your PC (PCI slot) and turn your PC into a local radio station. Play music to your community, start your own small FM radio station, also great for outdoor cinema, advertising, realtor radio, convenient wireless translation, guided tours...